




ExValue™


Shrink Film

Performance Features

- Excellent Optics
- Superior Tensile Strength and Tear Resistance
- Consistently Strong Seals
- Complies with FDA Standards
- Exceptional Value
- 100% Recyclable 

Customer Values

- **Excellent Optics** enhance your retail product presentation to attract more customers.
- **Exceptional Tensile Strength and Tear Resistance** gives added durability and toughness to ensure your product is better protected.
- **Consistently Strong Seals** withstand the rigors of high speed packaging insertion. Seals on all major brands of shrink equipment.
- **Complies with FDA Standards** for direct contact with food.
- **Quality Product at a Competitive Price!**
- **ExValue™ is 100% Recyclable.**

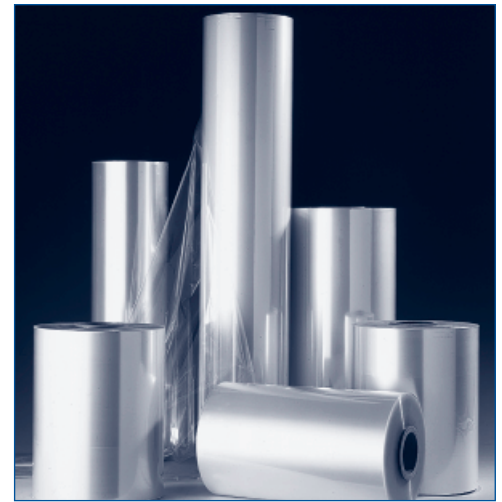

**Intertape Introduces
the Latest Addition
to its Extensive Line
of Shrink Film Products...**

ExValue™ Shrink Film


IPG offers a unique line of cross-linked, polyolefin shrink films, available in a wide choice of gauges, widths and film designs, such as print-treated and perforated, to ensure you have the best film for the application.

These include:

- **Exfilm® HSP – High Speed Shrink Film**
- **Exfilm® QSL – Quick Shrink & Slip Film**
- **Exfilmplus™ LTG – Light Gauge Shrink Film**
- **Exfilmplus™ – Performance Shrink Film**
- **Exfilmplus™ LTF – Light Force Shrink Film**
- **Exfilmplus™ AF – Anti-Fog Performance Shrink Film**

ExValue™

Shrink Film

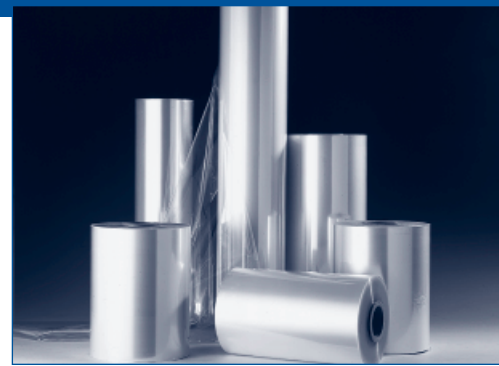

CHARACTERISTICS	TEST METHOD	REPRESENTATIVE VALUES					
		60		75		100	
Gauge		60		75		100	
Roll Length–Center Fold		4,375		3,500		2,625	
Roll Length–Single Wound		8,750		7,000		5,250	
Low Temperature Usage (F)		-45		-45		-45	
Shrink Temperature (F)		240-340°		240-340°		240-340°	
Max. Storage Temp. (F) 2 yrs. max.		90°		90°		90°	
Haze (%) D1003		2.8		3.2		3.6	
Gloss at 20° D2457		118		117		115	
Coefficient of Friction (film to film), kinetic	D1894	.25		.25		.25	
Oxygen Transmission Rate (cc / 100 in2 / 24 hrs.)	D3985	425		341		329	
Water Vapor Transmission Rate (g / 100 in2 / 24 hrs.)	F1249	.301		.282		.234	
Yield in Square Inches per Lb.		49,000		40,500		30,400	
		MD	TD	MD	TD	MD	TD
Tensile Strength (psi)	D882-80	17,000	17,000	17,000	17,000	17,000	17,000
Elongation at Break (%)	D882-80	115	117	115	120	115	120
Stiffness Modulus (psi)	D882-80	49,000	42,000	49,000	47,000	47,000	40,000
Unrestrained Shrink (%) @250°F	D2732	56	56	56	56	56	56z
Tear Propagation (g/ply)	D1922	12	12	15	15	22	22

Note: These values are typical and not intended as limiting specifications.

Corporate Profile

Intertape Polymer Group Inc. (IPG) is an acknowledged leader in the packaging industry, assembling the broadest and deepest range of products in the industry.

IPG is widely-recognized for its development and manufacture of specialized polyolefin plastic and paper-based packaging products, as well as complementary packaging systems for industrial and retail use. Additionally, IPG is a woven and flexible intermediate bulk container (FIBC) manufacturer. Its performance products, including tapes and cloths, are designed

for demanding aerospace, automotive and industrial applications.

Established in 1981 and headquartered in Montreal, Quebec and Sarasota/Bradenton, Florida, Intertape employs approximately 2,600 employees with operations in 19 locations, including 15 manufacturing facilities in North America and one in Europe. Intertape Polymer Group Inc. is a publicly traded company with its common shares listed on the New York Stock Exchange and The Toronto Stock Exchange under the stock symbol "ITP".

Team IPG... Working For You!

IPG's distribution network and company sales offices are conveniently located throughout North America. You'll find that our dedicated local distributors are ready to supply you with Intertape products and services, assisted by IPG's highly trained sales and service representatives, who offer quick response with the technical expertise you need. These IPG associates, and our distributors, combine to make up an unmatched team that provides you with the best service possible, and right in your own back yard.



CUSTOMER SERVICE:

Toll Free: 800-IPG-8273/800-474-8273
Montreal, QC: Fax: 800-561-3671
E-Mail: info@itape.com
Web: www.intertapepolymer.com